




AD12038 ES SERIES

Preliminary

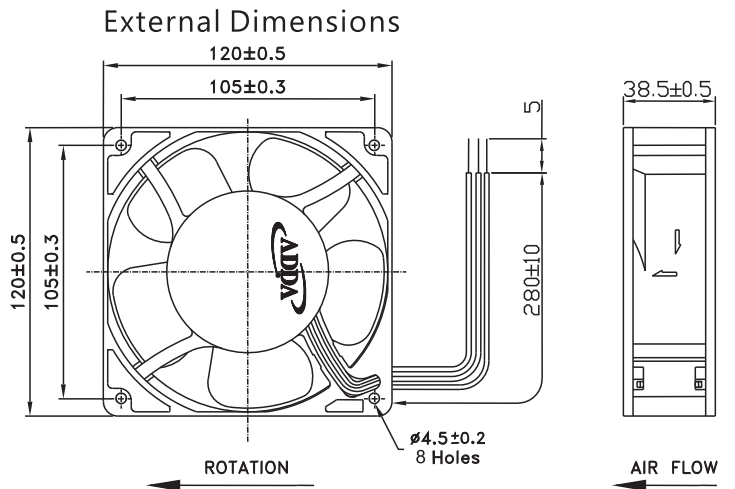

Frame:Plastic(UL:94V-0),Aluminum
 Impeller:Plastic(UL:94V-0)
 Lead wire:UL1007AWG24


Ps. Two different frame materials (Plastic and Aluminum) can be used for AD12038, please note which kind of material you're interested and inform your sales if needed.

Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
120x120x38	AD12012DB385100	◎※●	12	0.10	1.20	1500	1.621	57.292	0.085	2.159	28.4	235.0 /Plastic 297.0 /Aluminum
	AD12012LB385100	◎※●	12	0.17	2.04	1950	2.027	71.635	0.128	3.251	36.2	
	AD12012MB385100	◎※●	12	0.28	3.36	2540	2.725	96.300	0.228	5.791	45.0	
	AD12012HB385100	◎※●	12	0.39	4.68	2800	2.984	105.461	0.265	6.731	46.7	
	AD12012UB385100	◎※●	12	0.55	6.60	3200	3.399	120.109	0.335	8.509	48.0	
Specifications subject to change without notice.												

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
 (網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

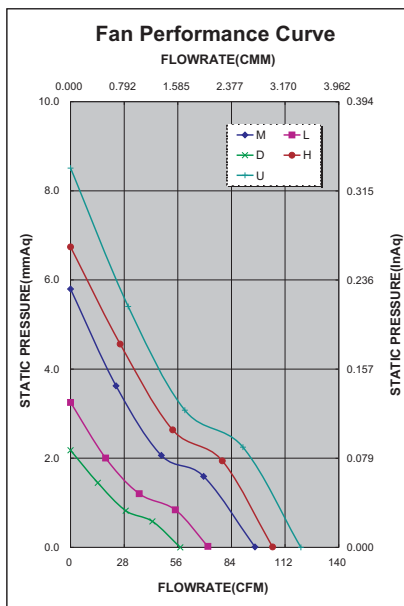

热设计网 <http://www.resheji.com>

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓	✓	✓					

*Safety approvals

				✓