




AD2506 SERIES

External Dimensions

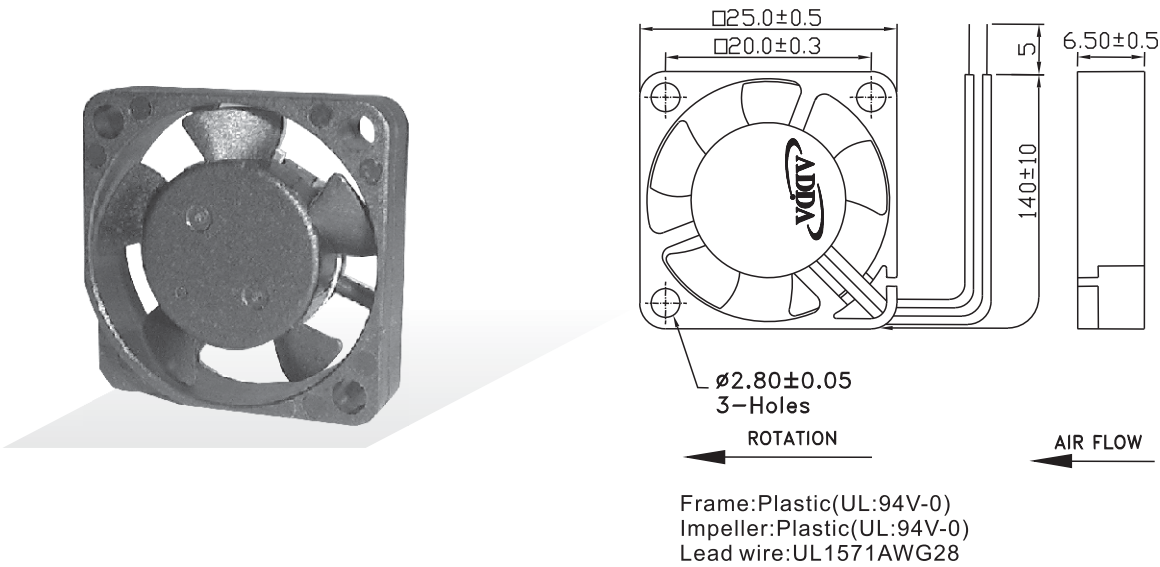

热设计网 <http://www.resheji.com>


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.
Bearing type: ○=Ball ※=Sleeve ◯=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
25x25x06	AD0205DX-K50	○●	5	0.051	0.255	7000	0.039 1.400	0.060 1.524	14.0	5.0
	AD0205LX-K50	○●	5	0.086	0.430	9000	0.050 1.800	0.110 2.794	21.5	
	AD0205MX-K50	○●	5	0.113	0.565	12000	0.067 2.400	0.185 4.699	29.0	
	AD0205HX-K50	○●	5	0.148	0.740	14000	0.073 2.600	0.200 5.080	35.0	
	AD0212LX-K50	○●	12	0.046	0.552	9000	0.050 1.800	0.110 2.794	21.5	
	AD0212MX-K50	○●	12	0.053	0.636	12000	0.067 2.400	0.185 4.699	29.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以參考為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

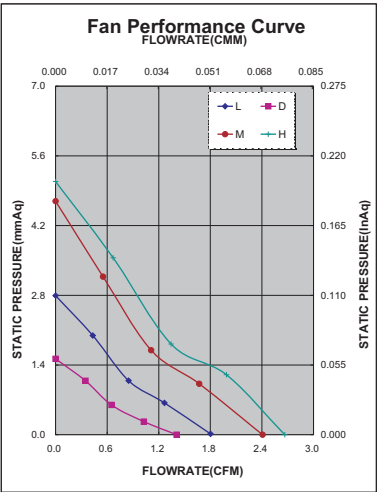

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓							

*Safety approvals

UL	cUL	CSA	DAUGHT COMPLIANT	CE
✓	✓			✓