




AD2510 SERIES

External Dimensions

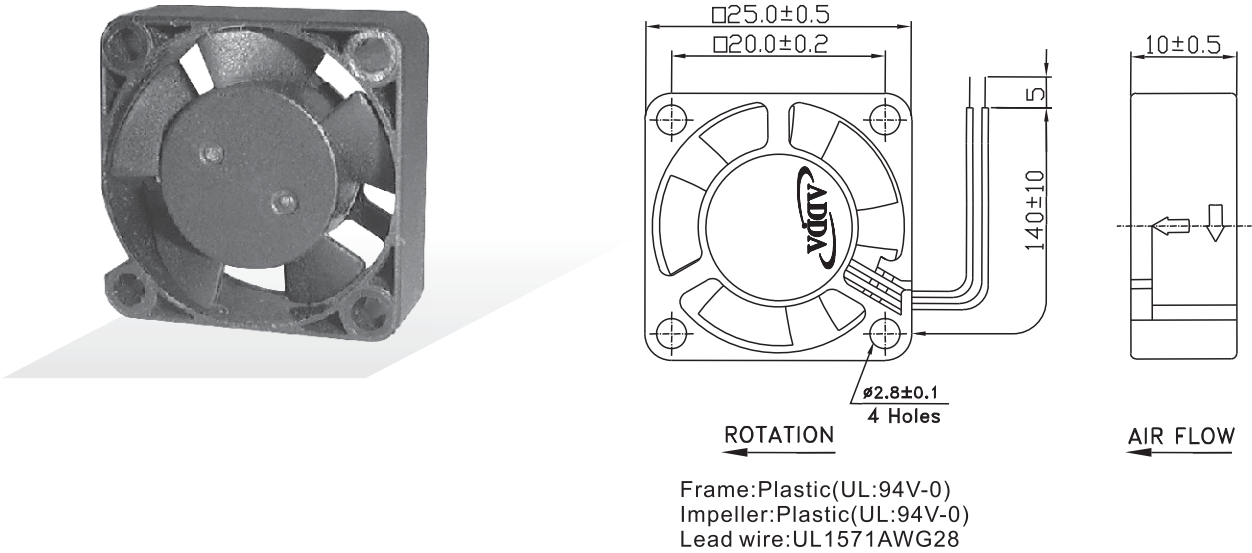

Specifications(Nominal)


*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
25x25x10	AD0205LB-G50GL	◎ ○ ●	5	0.080	0.40	8000	0.045	1.600	0.090	2.286	18.3	8.0
	AD0205MB-G50GL	◎ ○ ●	5	0.079	0.50	10000	0.059	2.100	0.150	3.810	23.0	
	AD0212DB-G50GL	◎ ○ ●	12	0.040	0.48	6000	0.037	1.307	0.065	1.651	12.5	
	AD0212LB-G50GL	◎ ○ ●	12	0.045	0.84	8000	0.045	1.600	0.090	2.286	18.3	
	AD0212MB-G50GL	◎ ○ ●	12	0.058	0.72	10000	0.059	2.100	0.150	3.810	23.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

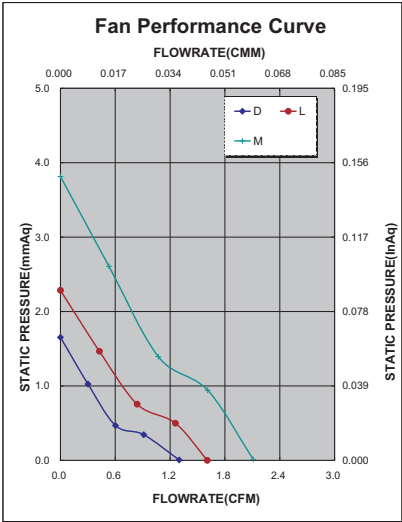

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓		✓					

*Safety approvals

✓	✓		✓	✓