




AD3015 SERIES

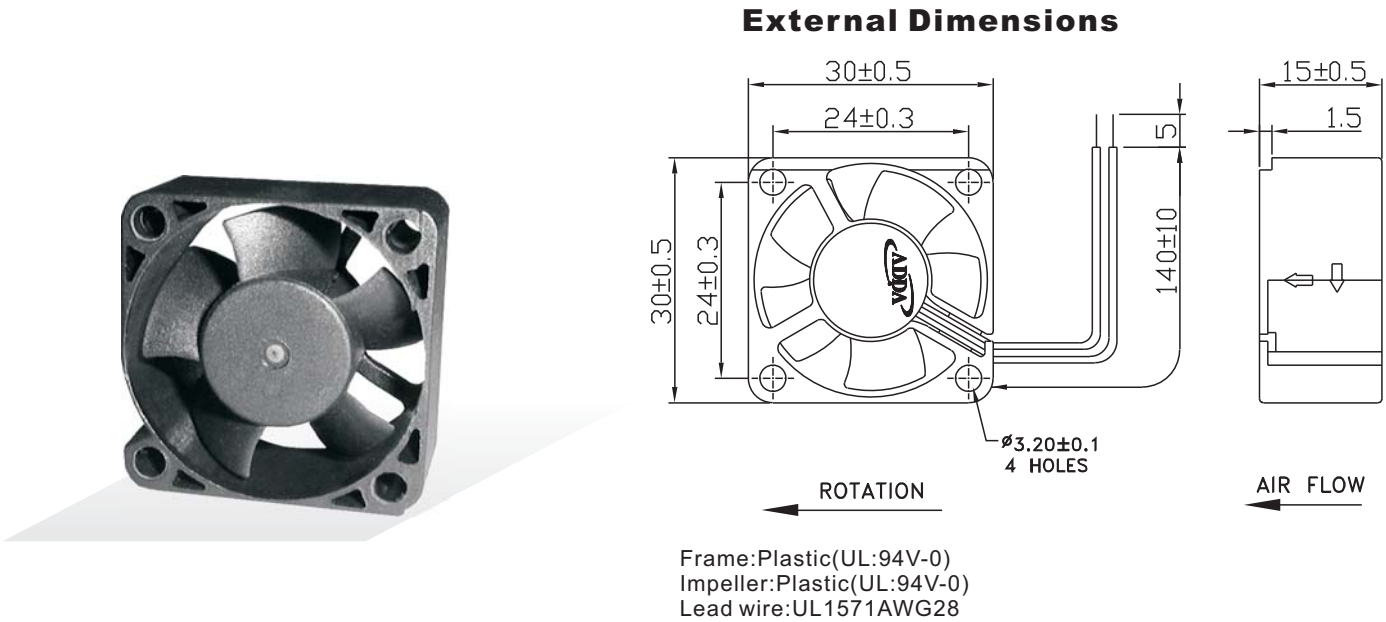


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ⊗=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
30x30x15	AD0305LB-D50	◎	5	0.038	0.190	4500	0.062	2.20	0.045	1.13	10.0	10.0
	AD0305MB-D50	◎	5	0.055	0.275	5500	0.074	2.60	0.074	1.50	16.0	
	AD0305HB-D50	◎	5	0.110	0.550	7000	0.105	3.70	0.110	2.75	22.5	

Specifications subject to change without notice.

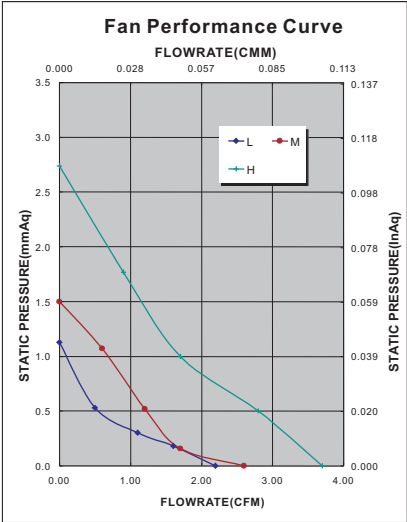

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓		✓					

*Safety approvals

✓	✓		✓	✓