


AD3510 SERIES

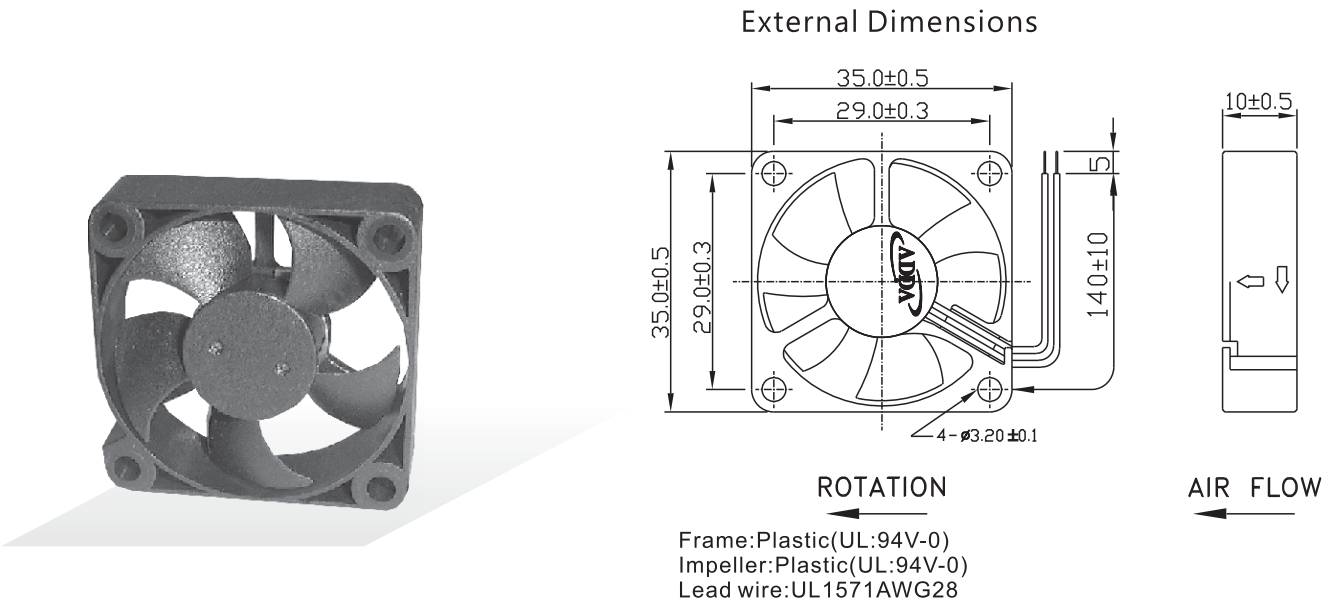

Specifications(Nominal)


*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)	Maximum Pressure (InAq) (mmAq)	*Noise Level (dB/A)	Weight (g)
35x35x10	AD3505DB-G50	◎ ○ ●	5	0.042	0.210	4500	0.084 3.000	0.050 1.270	17.0	9.0
	AD3505LB-G50	◎ ○ ●	5	0.088	0.440	7000	0.141 5.000	0.100 2.540	28.0	
	AD3505MB-G50	◎ ○ ●	5	0.125	0.625	8000	0.169 6.000	0.170 4.318	32.0	
	AD3505HB-G50	◎ ○ ●	5	0.145	0.725	9500	0.203 7.200	0.200 5.080	36.0	
	AD3512LB-G50	◎ ○ ●	12	0.050	0.600	7000	0.141 5.000	0.100 2.540	28.0	
	AD3512MB-G50	◎ ○ ●	12	0.052	0.624	8000	0.169 6.000	0.170 4.318	32.0	
	AD3512HB-G50	◎ ○ ●	12	0.090	1.080	9500	0.203 7.200	0.200 5.080	36.0	

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

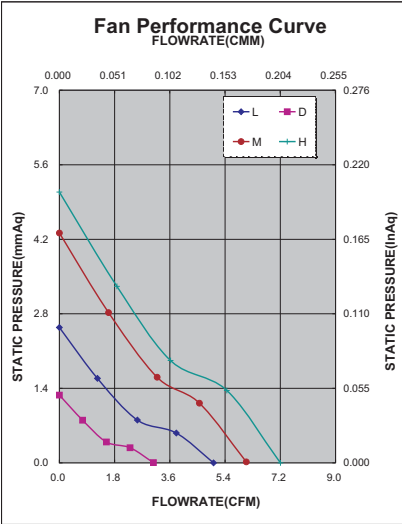

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓		✓		✓					

*Safety approvals

				
✓	✓		✓	✓