


AD4028 SERIES

External Dimensions

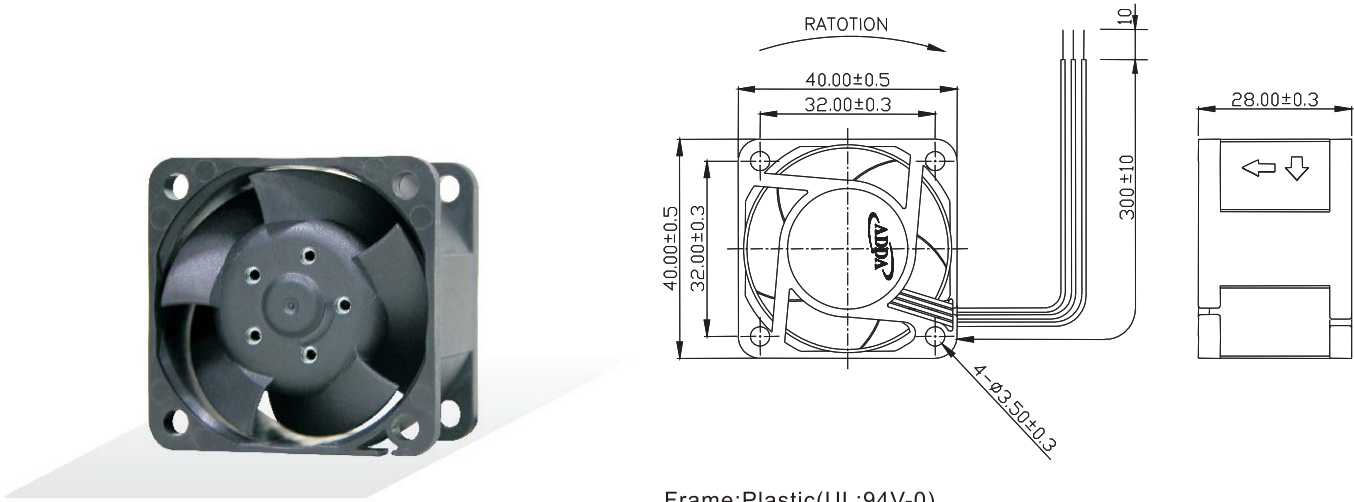

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1061AWG26


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
40x40x28	AD04012DB285300(00LAP)	◎	12	0.13	1.56	8000	0.248	8.75	0.431	10.94	27.4	57.0
	AD04012LB285300(00LAP)	◎	12	0.21	2.52	11000	0.358	12.63	0.724	18.40	36.8	
	AD04012MB285300(00LAP)	◎	12	0.32	3.84	14000	0.450	15.89	1.240	31.50	46.6	
	AD04012HB285300(00LAP)	◎	12	0.50	6.00	16500	0.544	19.23	1.713	43.50	48.8	
	AD04012UB285300(00LAP)	◎	12	0.60	7.20	18000	0.587	20.72	1.949	49.80	50.8	

Specifications subject to change without notice.

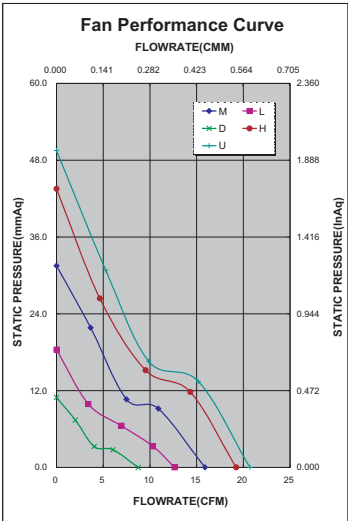

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓							✓

*Safety approvals

				
✓	✓	✓	✓	✓