


AD4028DS(HFP) SERIES

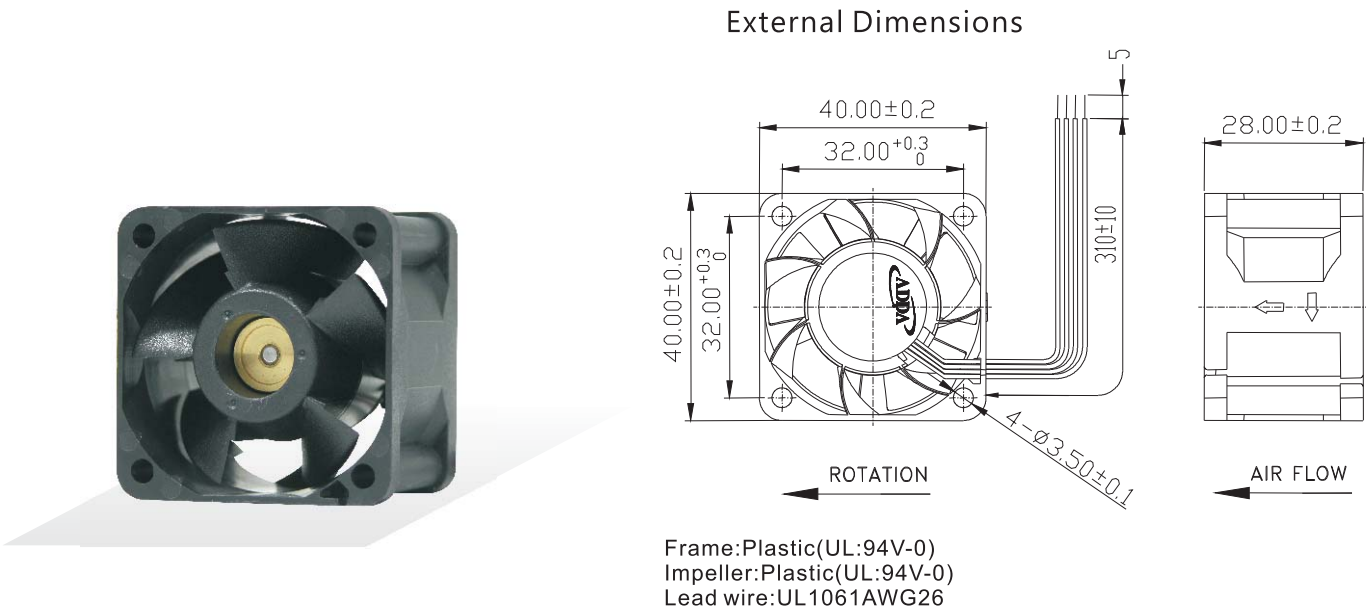


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
40x40x28	AD0412HB-B5BDS(HFP)	◎	12	0.30	3.60	11000	0.512	18.10	0.870	22.45	48.0	42
	AD0412UB-B5BDS(HFP)	◎	12	0.40	4.80	13000	0.623	22.00	1.200	30.48	52.5	
	AD0412XB-B5BDS(HFP)	◎	12	0.59	7.08	15000	0.722	25.20	1.600	40.64	56.0	
	AD0412VB-B5BDS(HFP)	◎	12	0.70	8.40	16000	0.764	27.00	1.850	46.99	58.0	

Specifications subject to change without notice.

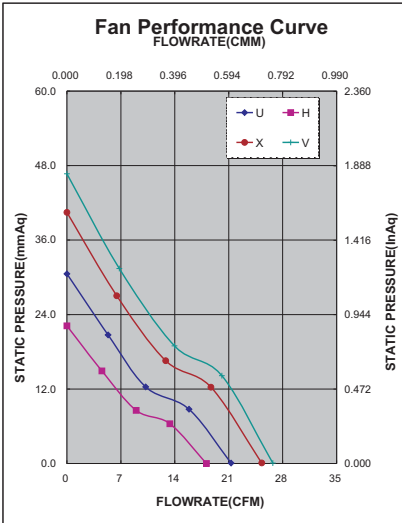

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓	✓	✓					✓		✓

*Safety approvals

				
✓	✓		✓	✓