




AD6025 SERIES


External Dimensions

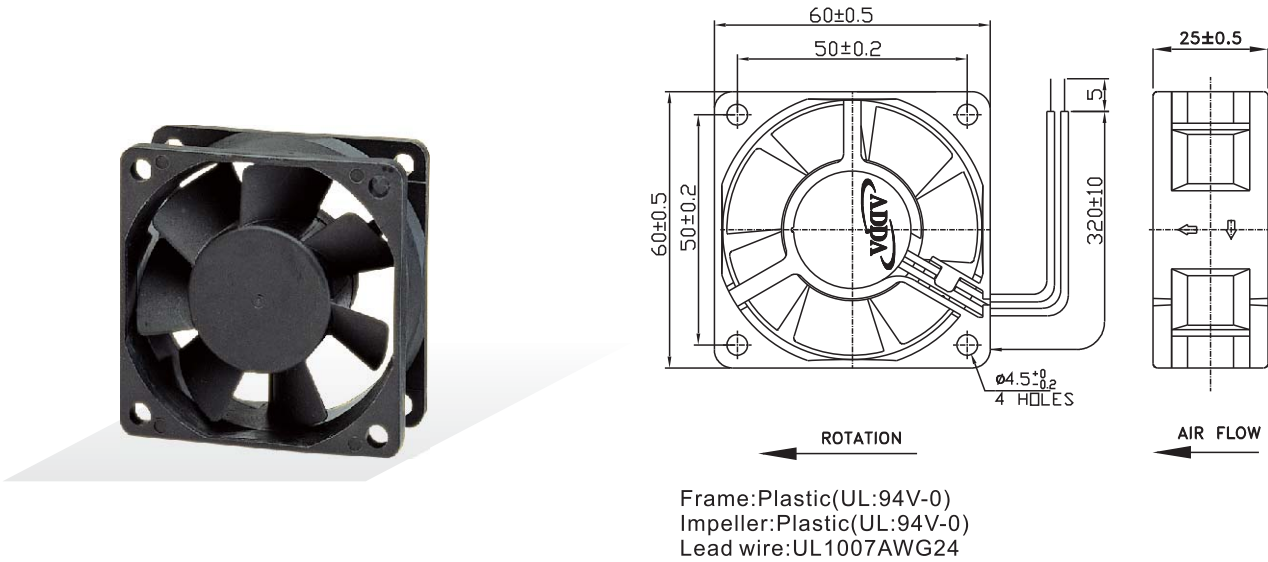

Specifications(Nominal)

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
60x60x25	AD0605LB-A71GL	◎ ※ ●	5	0.08	0.40	2500	0.373	13.200	0.063	1.600	18.1	53.0
	AD0605MB-A71GL	◎ ※ ●	5	0.17	0.85	3500	0.506	17.880	0.125	3.175	27.9	
	AD0605HB-A71GL	◎ ※ ●	5	0.35	1.75	4500	0.688	24.330	0.207	5.257	36.3	
	AD0612LB-A71GL	◎ ※ ●	12	0.04	0.48	2500	0.373	13.200	0.063	1.600	18.1	
	AD0612MB-A71GL	◎ ※ ●	12	0.08	0.96	3500	0.506	17.880	0.125	3.175	27.9	
	AD0612HB-A71GL	◎ ※ ●	12	0.13	1.56	4500	0.688	24.330	0.207	5.257	36.3	
	AD0612UB-A71GL	◎ ※ ●	12	0.21	2.52	5000	0.789	27.880	0.242	6.146	37.6	
	AD0612XB-A71GL	◎	12	0.30	3.60	6100	0.888	31.400	0.320	8.128	42.9	
	AD0624LB-A71GL	◎ ※ ●	24	0.07	1.68	2500	0.373	13.200	0.063	1.600	18.1	
	AD0624MB-A71GL	◎ ※ ●	24	0.06	1.44	3500	0.506	17.880	0.125	3.175	27.9	
	AD0624HB-A71GL	◎ ※ ●	24	0.08	2.88	4500	0.688	24.330	0.207	5.257	36.3	
	AD0624UB-A71GL	◎ ※ ●	24	0.10	2.40	5000	0.789	27.880	0.242	6.146	37.6	

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

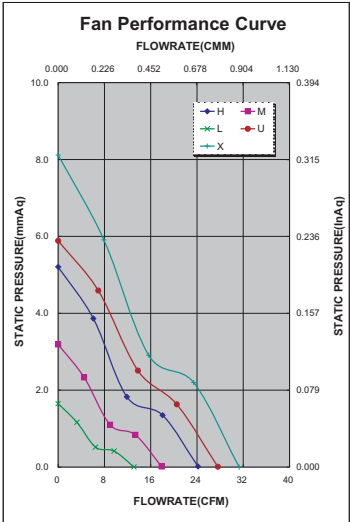

*Motor protective circuit and third lead wire functions											
0	1	2	3	4	6	7	8	9	A	B	
	✓	✓	✓	✓			✓	✓	✓	✓	

*Safety approvals				
				
✓	✓		✓	✓