


AD8015-7 SERIES

External Dimensions

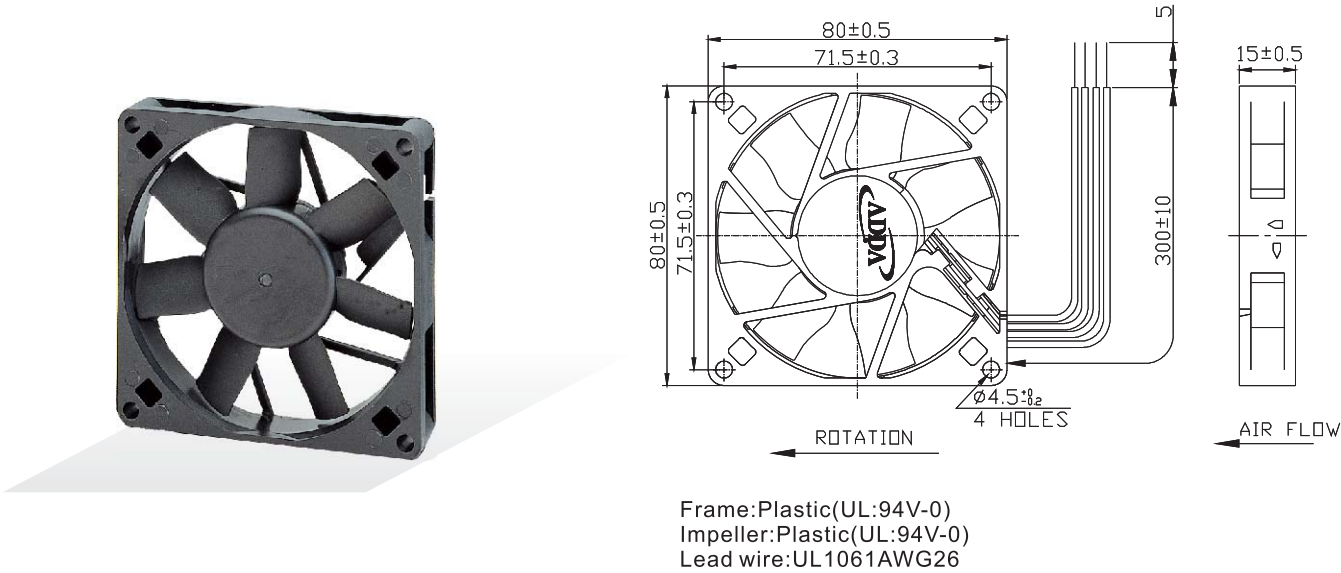


Specifications(Nominal)

Specifications(Nominal)

*:Noise is measured at the distance of one (1)meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing												
Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
80x80x15	AD0812LB-D7B	◎ ※ ●	12	0.09	1.08	2500	0.636	22.500	0.080	2.032	26.5	63.0
	AD0812MB-D7B	◎ ※ ●	12	0.12	1.44	3000	0.811	28.692	0.128	3.251	31.0	
	AD0812HB-D7B	◎ ※ ●	12	0.15	1.80	3500	0.891	31.500	0.150	3.810	36.5	
	AD0812UB-D7B	◎ ※ ●	12	0.27	3.24	4000	1.032	36.500	0.195	4.953	40.0	
	AD0812XB-D7B	◎ ※ ●	12	0.33	3.96	4500	1.174	41.500	0.240	6.096	44.0	
	AD0812VB-D7B	◎ ●	12	0.40	4.80	5000	1.301	46.000	0.290	7.366	46.0	
Specifications subject to change without notice.												

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

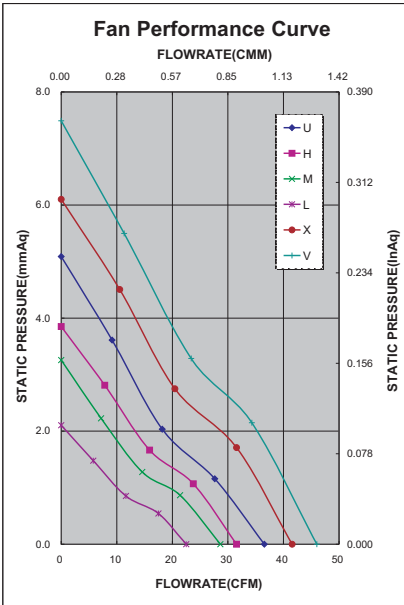

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
								✓		✓

*Safety approvals

				
✓	✓		✓	✓