


AD8015-9(T) SERIES

External Dimensions

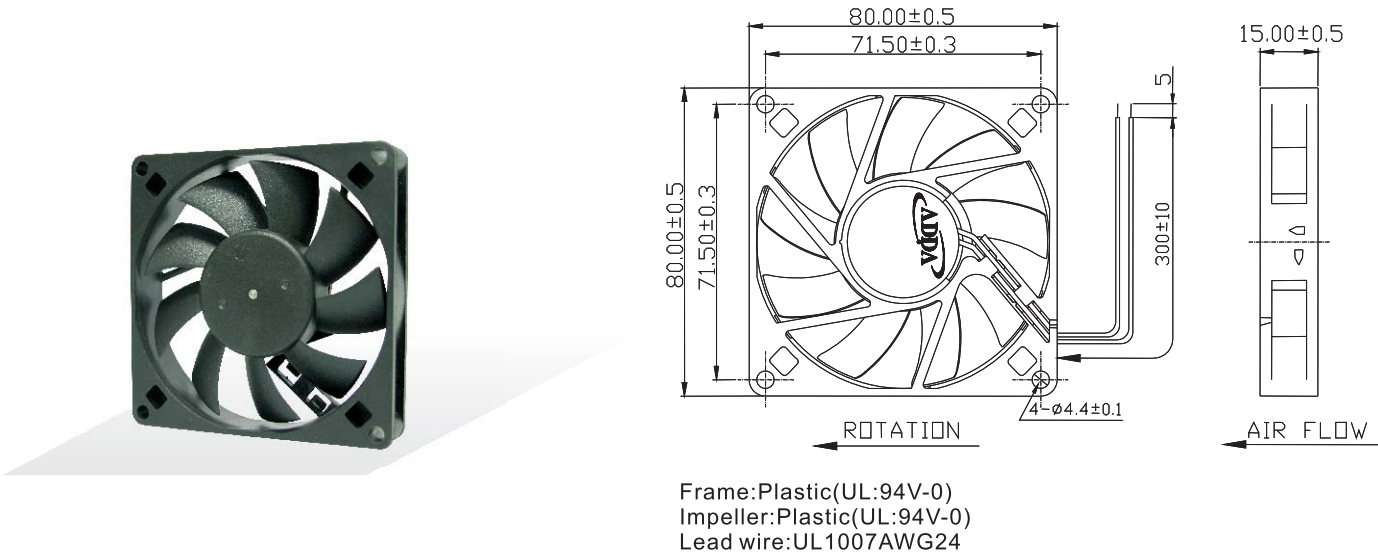

Specifications(Nominal)


Frame size (mm)	Model No.	Bearing System		Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
		Type						(CMM)	(CFM)	(InAq)	(mmAq)		
80x80x15	AD0812DB-D90(T)	◎	※	12	0.07	0.84	2500	0.706	24.958	0.086	2.184	30.2	63.0
	AD0812LB-D90(T)	◎	※	12	0.10	1.20	3000	0.837	29.581	0.117	2.971	36.0	
	AD0812MB-D90(T)	◎	※	12	0.14	1.68	3500	0.987	34.897	0.155	3.934	40.4	
	AD0812HB-D90(T)	◎	※	12	0.20	2.40	4000	1.135	40.111	0.195	4.958	44.5	
	AD0812UB-D90(T)	◎	※	12	0.26	3.12	4500	1.274	45.019	0.248	6.306	48.0	
	AD0824DB-D90(T)	◎	※	24	0.04	0.96	2500	0.706	24.958	0.086	2.184	30.2	
	AD0824LB-D90(T)	◎	※	24	0.05	1.20	3000	0.837	29.581	0.117	2.971	36.0	
	AD0824MB-D90(T)	◎	※	24	0.06	1.44	3500	0.987	34.897	0.155	3.934	40.4	
	AD0824HB-D90(T)	◎	※	24	0.10	2.40	4000	1.135	40.111	0.195	4.958	44.5	
	AD0824UB-D90(T)	◎	※	24	0.14	3.36	4500	1.274	45.019	0.248	6.306	48.0	

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

*Noise is measured at the distance of one (1) meter from the axis of intake.

Specifications subject to change without notice.

The specification for bearing type is for reference only , for more bearing types information, please contact with your ADDA sales representative, thanks!!
(網頁上呈現產品軸承資訊均以2Ball為主，若需其他產品資訊請聯絡您在ADDA的業務代表，謝謝！！)

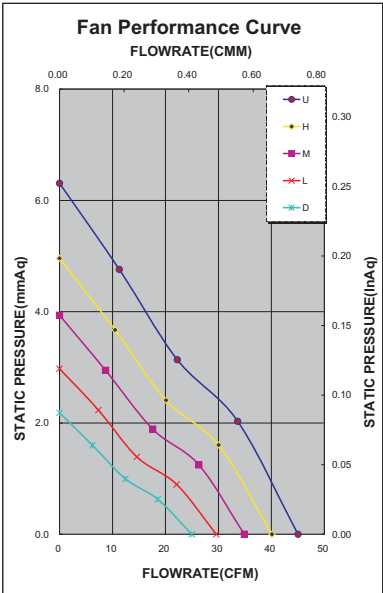

*Motor protective circuit and third lead wire functions										
0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals				
				
✓	✓		✓	✓