




AG3010 SERIES



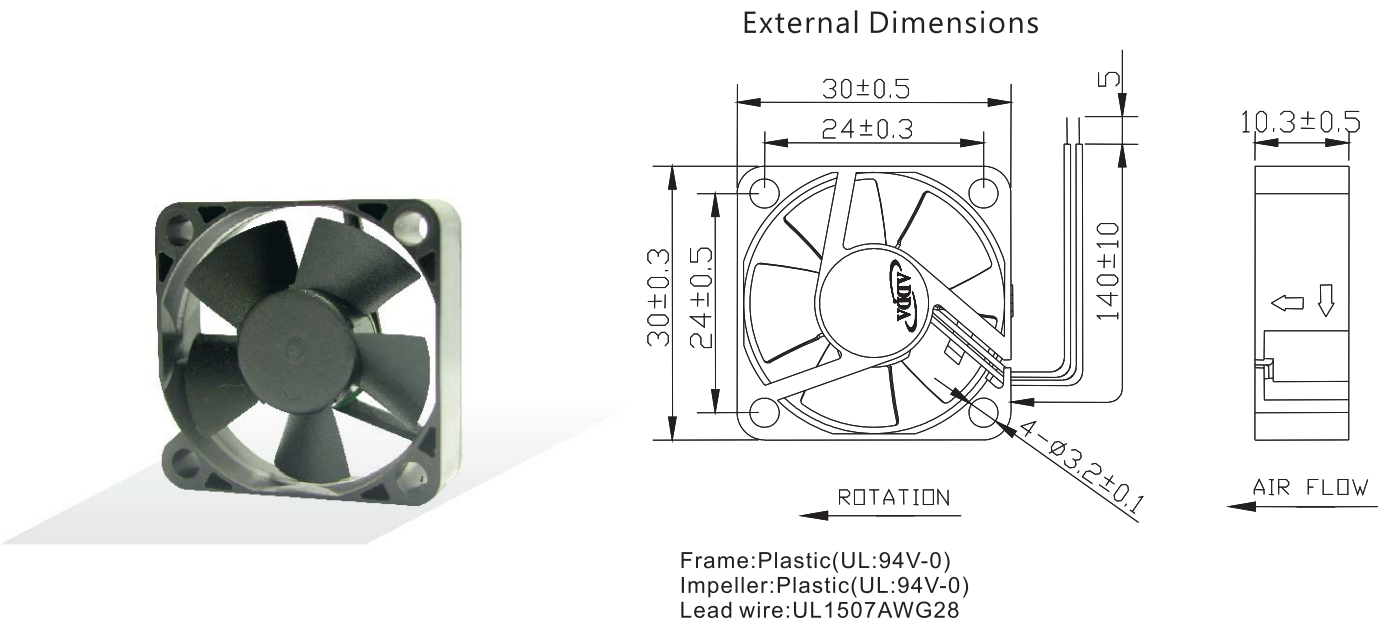


Specifications(Nominal)

*Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball※=Sleeve○=1B1S●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM) (CFM)		Maximum Pressure (InAq) (mmAq)		*Noise Level (dB/A)	Weight (g)
30x30x10	AG03005LX105100	●	5	0.07	0.35	6500	0.098	3.460	0.099	2.520	17.5	6.5
	AG03005MX105100	●	5	0.11	0.55	8000	0.123	4.340	0.137	3.480	22.3	
	AG03005HX105100	●	5	0.12	0.60	9500	0.154	5.450	0.204	5.180	27.0	

Specifications subject to change without notice.

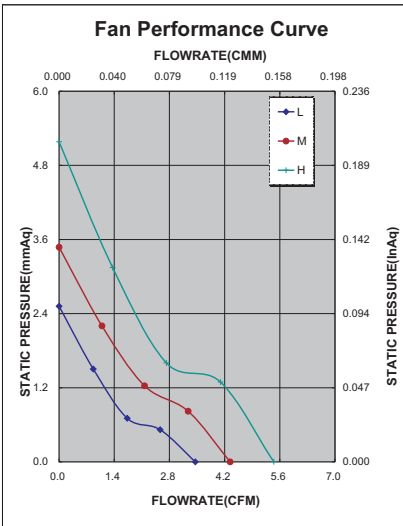

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
	✓		✓							

*Safety approvals

				
				✓