


AG9225G2 SERIES

External Dimensions

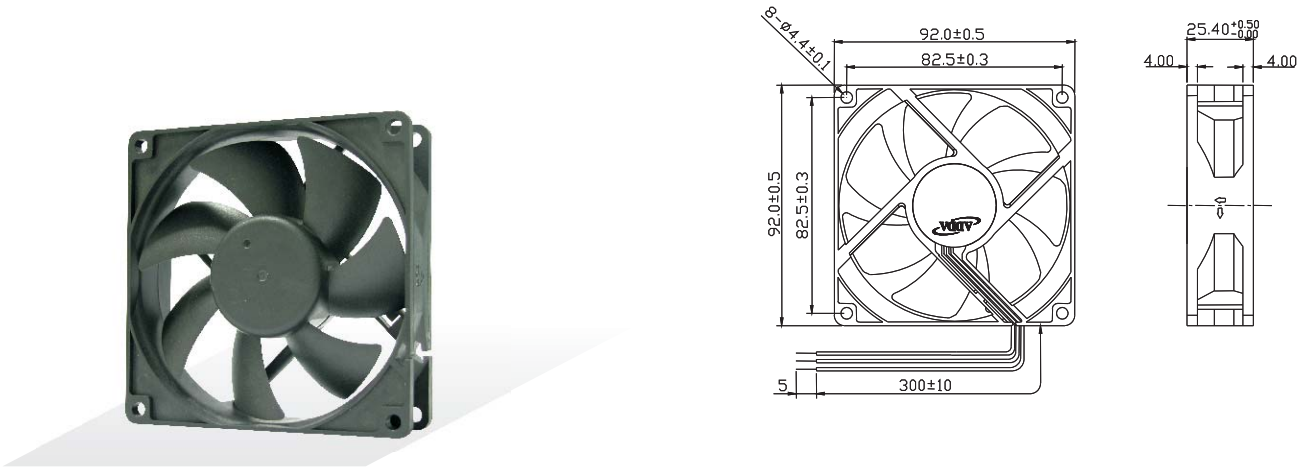

Frame:Plastic(UL:94V-0)
Impeller:Plastic(UL:94V-0)
Lead wire:UL1007AWG24


Specifications(Nominal)

*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ⊗=Sleeve ○=1B1S ●=Hypro bearing

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (VDC)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		*Noise Level (dB/A)	Weight (g)
92x92x25	AG09212DB257010	◎	12	0.13	1.56	2000	1.086	38.366	0.084	2.151	26.3	108
	AG09212LB257010	◎	12	0.16	1.92	2500	1.365	48.232	0.128	3.266	32.1	
	AG09212MB257010	◎	12	0.22	2.64	3000	1.635	57.767	0.200	5.090	36.5	
	AG09212HB257010	◎	12	0.31	3.72	3300	1.828	64.563	0.238	6.057	39.2	
	AG09212UB257010	◎	12	0.35	4.20	3600	2.010	71.003	0.282	7.172	42.0	

Specifications subject to change without notice.

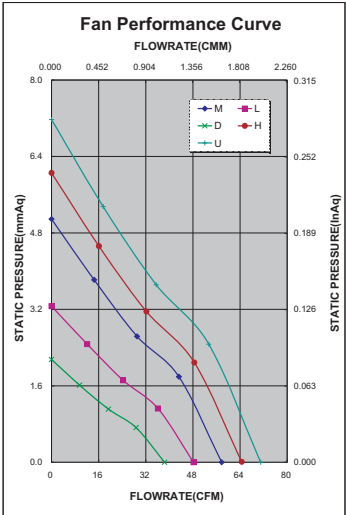

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓					✓					

*Safety approvals

				
				✓