


# AS6038 SERIES



Preliminary

## External Dimensions

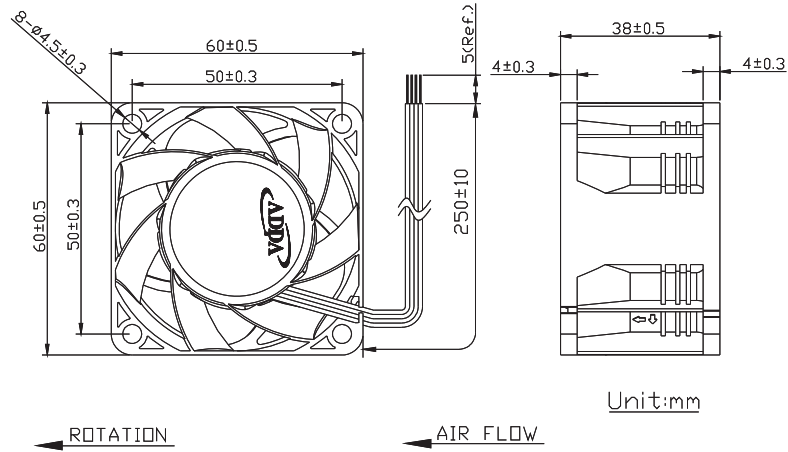

Frame:Plastic(UL:94V-0)  
Impeller:Plastic(UL:94V-0)  
Lead wire:UL1061AWG26


## Specifications(Nominal)

\*:Noise is measured at the distance of one (1) meter from the axis of intake.

Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

| Frame size (mm) | Model No.       | Bearing System Type | Rated Voltage (VDC) | Current (A) | Power (W) | Rated Speed (rpm) | Maximum AirFlow (CMM) | Maximum AirFlow (CFM) | Maximum Pressure (InAq) | Maximum Pressure (mmAq) | *Noise Level (dB/A) | Weight (g) |
|-----------------|-----------------|---------------------|---------------------|-------------|-----------|-------------------|-----------------------|-----------------------|-------------------------|-------------------------|---------------------|------------|
| 60x60x38        | AS06012UB385BB0 | ◎                   | 12                  | 1.64        | 19.70     | 17500             | 1.840                 | 65.000                | 3.354                   | 85.200                  | 68.0                | 143.0      |

Specifications subject to change without notice.

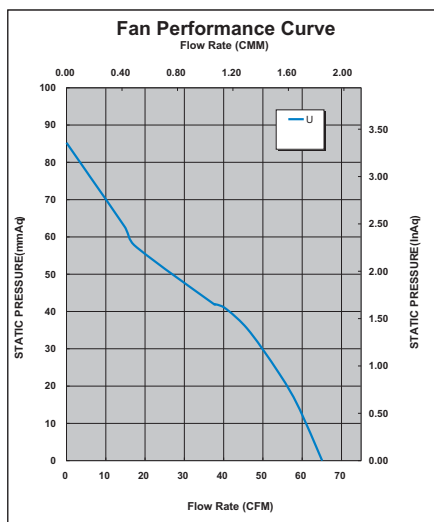

\*Motor protective circuit and third lead wire functions

| 0 | 1 | 2 | 3 | 4 | 6 | 7 | 8 | 9 | A | B |
|---|---|---|---|---|---|---|---|---|---|---|
|   | ✓ | ✓ | ✓ |   |   |   |   |   |   | ✓ |

\*Safety approvals

|  |  |  |  |   |
|--|--|--|--|---|
|  |  |  |  |   |
|  |  |  |  | ✓ |