



60x60x20 mm

16.5~25.5 CFM



|  | Bearing | Rating Voltage | Power Current | Power Consumption | Speed | Air Flow | Static Pressure         | Noise | Weight | Curve |
|-----------------------------------------------------------------------------------|---------|----------------|---------------|-------------------|-------|----------|-------------------------|-------|--------|-------|
|                                                                                   | ● VAPO  | (VDC)          | (mA)          | (WATTS)           | (RPM) | (CFM)    | (Inch-H <sub>2</sub> O) | (dBA) | (g)    |       |
| MB60201VX-0000-A99                                                                | ●       | 12             | 210           | 2.52              | 5100  | 25.5     | 0.24                    | 39.0  | 51.0   | 1     |
| MB60201V1-0000-A99                                                                | ●       | 12             | 135           | 1.62              | 4500  | 23.0     | 0.18                    | 33.5  | 51.0   | 2     |
| MB60201V2-0000-A99                                                                | ●       | 12             | 79            | 0.95              | 3700  | 19.0     | 0.14                    | 29.0  | 51.0   | 3     |
| MB60201V3-0000-A99                                                                | ●       | 12             | 50            | 0.60              | 3000  | 16.5     | 0.10                    | 23.0  | 51.0   | 4     |
| MB60202VX-0000-A99                                                                | ●       | 24             | 115           | 2.76              | 5100  | 25.5     | 0.24                    | 39.0  | 51.0   | 1     |
| MB60202V1-0000-A99                                                                | ●       | 24             | 75            | 1.80              | 4500  | 23.0     | 0.18                    | 33.5  | 51.0   | 2     |
| MB60202V2-0000-A99                                                                | ●       | 24             | 48            | 1.16              | 3700  | 19.0     | 0.14                    | 28.0  | 51.0   | 3     |
| MB60202V3-0000-A99                                                                | ●       | 24             | 33            | 0.80              | 3000  | 16.5     | 0.10                    | 23.0  | 51.0   | 4     |

| Model              | 2BALL<br>○ Sleeve | (VDC) | (mA) | (WATTS) | (RPM) | (CFM) | (Inch-H <sub>2</sub> O) | (dBA) | (g)  | Curve |
|--------------------|-------------------|-------|------|---------|-------|-------|-------------------------|-------|------|-------|
| EB60201S1-0000-999 | ○                 | 12    | 153  | 1.84    | 4500  | 23.0  | 0.18                    | 33.5  | 51.0 | 2     |
| EB60201S2-0000-999 | ○                 | 12    | 89   | 1.07    | 3700  | 19.0  | 0.14                    | 28.0  | 51.0 | 3     |
| EB60201S3-0000-999 | ○                 | 12    | 58   | 0.70    | 3000  | 16.5  | 0.10                    | 23.0  | 51.0 | 4     |

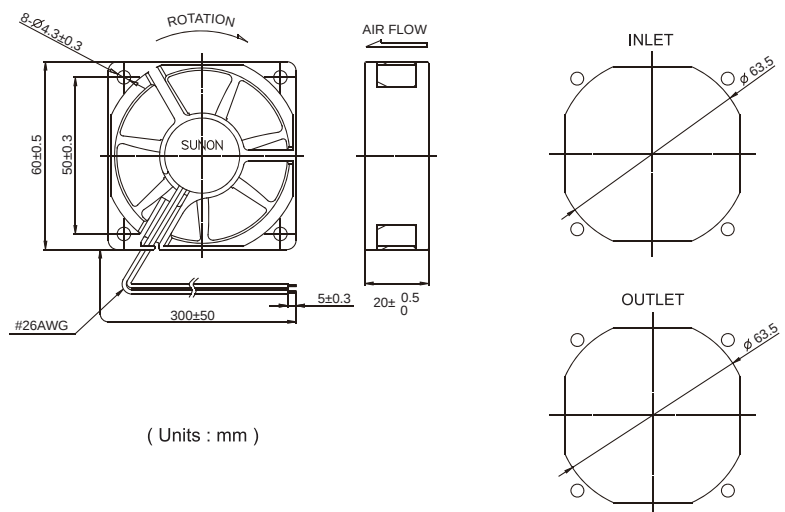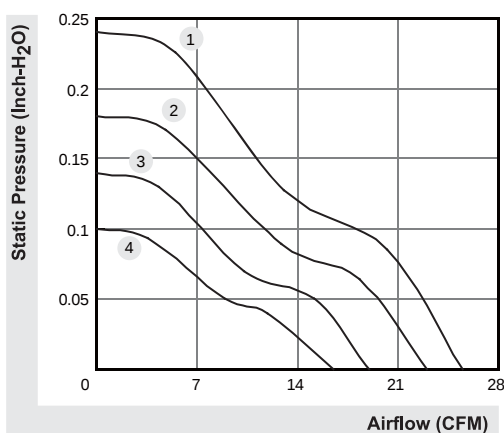

( Units : mm )

\*All model could be customized. Please contact with Sunon Sales.

\*Specifications are subject to change without notice. Please Visit SUNON web site at <http://www.sunon.com> for update information.